

ELIMINATE HOLES BEING DRILLED IN YOUR FLOORS




THE CANZAC® TILT BRACKET SAVES YOUR SLABS

**Revolutionary New Tilt-Panel Forming System
REDUCES INSTALLATION TIME UP TO 60%**



- **Superquick**
- **No Drill Bits**
- **No Patching Required**
- **Lightweight**
- **Re-Usable Brackets**
- **Recycled Composite Plastic**

**COST SAVINGS FOR CONTRACTORS!
BETTER FINISHED FLOORS!**

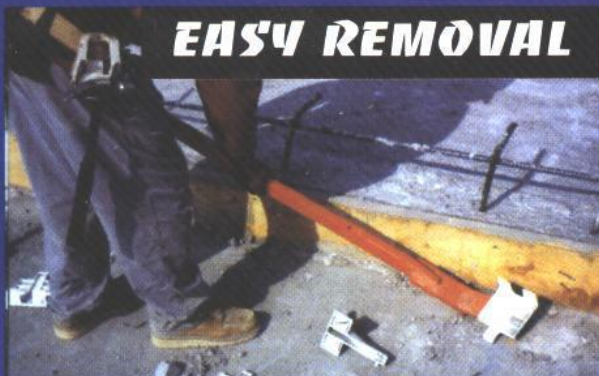

EASY REMOVAL



NO DAMAGE TO SLAB

CANZAC®

The Concrete Joint Specialists

www.canzac.com

Please enquire about our range of products:

ROUND SPEED DOWELS, SQUARE SPEED DOWELS, DOWEL ASSEMBLIES, FIBREDOWELS, EXPANSION JOINTS, STEEL ARMOURED JOINTS, METAL & PLASTIC KEYWAYS, G-SEAL, TILT BRACKET, WILLSEAL, SCS STRIP, PVC WATERSTOPS, SWELLSTOP WATERSTOP, SUPERTIE FIBREGLASS FORMTIES, BAR CHAIRS, CHAMFER STRIP, POLYPROPYLENE FIBRES, NYCON FIBRES, FORMLINERS, CANZAC REBAR CAPS, CRACK INDUCERS

SLAB SAVER

COST COMPARISON

EXAMPLE 12 Tilt-up panels 5 metres x 6 metres, 22 lineal metres/panels 264 perimeter lineal metres.

<u>PROCEDURE</u>	<u>SLAB SAVER</u>	<u>TRADITIONAL METHOD</u>
Forming 1) Fix lengths of 100 x 50 timber to Slab using anchors/drive pins @ 600mm oc 440 @ 3mins each	----	22 mh
2) Fix Slab Saver Shoes to Slab @ 800mm oc 330 @ 1 min each	5.5 mh	----
3) Fix timber form board to plate, brace with timber blocks/angle braces etc @ 600mm oc 440 @ 4 mins each	----	29.3 mh
4) Click Slab Saver brackets into Slab Saver Shoes and screw to form 330 @ 2 mins each	11 mh	----
Stripping 1) Remove forms & bracing @ 4mins/metre		17.6 mh
2) Remove Slab Savers from form and shoe. Pry Shoe off Slab 330 @ 2 mins each	11 mh	----
TOTAL MAN HOURS	27.5 mh	68.9 mh
Summary 1) Labour Cost @ \$25.00 / hour	687.50	1722.50
Materials 2) 100 x 50 timber. 264 metres @ \$2.50/metre Block Braces 440 @ \$0.60 each Anchors/drive pins etc. 440 @ 0.75 each average Patching Slab	---- ---- ---- ----	660 264 330 750
3) Slab Saver Bracket @ \$3.95 x 330 : 25 uses	52.14	----
4) Slab Saver Shoes @ \$ 1.95 x 330	643.50	----

Total Costs

\$1383.14

\$3726.50

SAVINGS: \$2343.36 = 63% OR \$8.88 / Lineal Metre

CANZAC®

PO Box 3181, 50 Dakota Crescent, Sockburn, Christchurch, New Zealand

Phone: 03 343-4254 · Fax: 03 343-4237 · Email: canzac@inet.net.nz

www.canzac.com

Pioneering Innovative Solutions For Concrete Construction