

CANZAC[®]

Under Slab - In Slab - On Slab[®]



Manufactured from 100% Recycled Materials
CONTACT US for FREE SAMPLES


P: 0800 422 692

E: info@canzac.com

W: www.canzac.com

HEAVY DUTY PILE CAGE WHEEL

Co-Packers were the first to develop this style of Heavy Duty Range of Pile Cage Wheels. The extensive range is manufactured using 100% Recycled Polypropylene. Every Pile Cage Spacer Wheel is designed to allow easy installation even while the cage is being lowered into the ground. All Sizes in the Heavy Duty Range are **OPTIONALLY** available to suit AS/NZS 2425:2015 requirements.

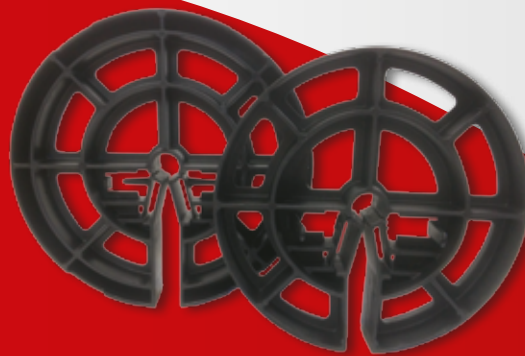

HEAVY DUTY PILE CAGE WHEEL OPTIONS

PRODUCT	PRODUCT CODE	CONCRETE COVER	QUANTITY PER BAG	QUANTITY PER PALLET
25mm Heavy Duty Wheel	HD25/20	25	250	8000
35mm Heavy Duty Wheel	HD35/20	35	200	6000
40mm Heavy Duty Wheel	HD40/20	40	100	3,600
50mm Heavy Duty Wheel	HD50/20	50	60	2880
65mm Heavy Duty Wheel	HD65/20	65	40	2400
75mm Heavy Duty Wheel	HD75/20	75	30	1440
80mm Heavy Duty Wheel	HD80/20	80	25	900
85mm Heavy Duty Wheel	HD85/20	85	25	1050
100mm Heavy Duty Wheel	HD100/20	100	30	810

Nominal wheel width 40mm. Suits bar size 10-19mm diameter

PUSH FIT MECHANISM

Co-Packers developed this unique push-fit design to provide a simple and effective mechanism to ensure correct fitting of the Pile Cage Spacer Wheel. Featured on all Pile Cage Wheels in the Heavy Duty and SS range.




SECURITY CLIP

The security clip is especially suited for use when increased retaining of the smaller diameter spiral is required. Featured on all Pile Cage Wheels in the Heavy Duty range.

CLOSE-HELIX CAGE WHEEL SPACER

The Close Helix Spacer is designed to be used when Pile Cage Helices (or Spirals) are too close together for a conventional Heavy Duty Spacer Wheel. This is often seen on Pile Cages where **Earthquake resistance** is required. The CH Spacer can be fitted as a SKID to provide cover where Helices are as close as 55mm.

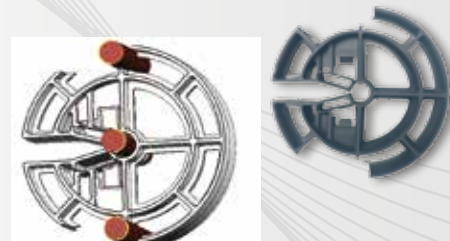


CLOSE-HELIX CAGE WHEEL SPACER OPTIONS

PRODUCT	PRODUCT CODE	CONCRETE COVER	SUIT BAR SIZE (MM)	WIDTH (MM)	QUANTITY PER BAG	QUANTITY PER PALLET
65 Close Helix	CH65/20	65	10-19	40	40	2,400
75 Close Helix	CH75/20	75	10-19	39	30	1,440
80 Close Helix	CH80/20	80	10-19	45	25	900
85 Close Helix	CH85/20	85	10-19	44	25	1,050
100 Close Helix	CH100/20	100	10-19	43	30	810

SS PILE CAGE WHEEL

Co-Packers developed the SS Range of Pile Cage Spacer Wheels to meet changes to state government regulations. The SS range uses a blend of Carbon modified Polymers to provide some outstanding properties to the product. The SS Range is approved for use in Australia by QLD Transport and Main Roads for use in Cast-in-place piles. (Complies with MRTS63)

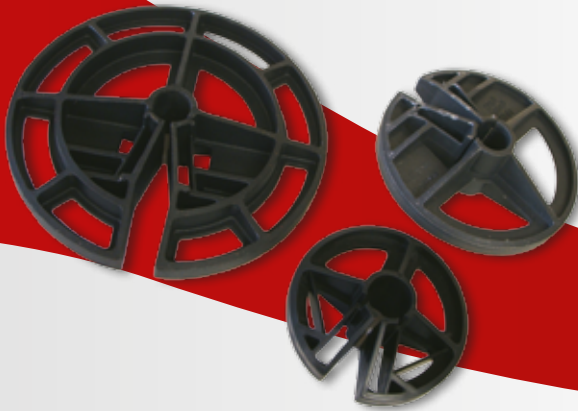

- Flame Resistant
- Insulating & Self-repairing
- Expands to bond to and seal inside concrete
- Suitable Compression strengths for use with concrete
- Tapered shape to allow concrete to flow through webbing

SS PILE CAGE WHEEL OPTIONS

PRODUCT	PRODUCT CODE	CONCRETE COVER	QUANTITY PER BAG	QUANTITY PER PALLET
SS 25/20	SS25/20 CBN	25mm	250	8,000
SS 35/20	SS35/20 CBN	35mm	200	6,000
SS 40/20	SS40/20 CBN	40mm	150	5,400
SS 50/20	SS50/20 CBN	50mm	60	2,880
SS 65/20	SS65/20 CBN	65mm	40	2,400
SS 75/20	SS75/20 CBN	75mm	58	1,392
SS 80/20	SS80/20 CBN	80mm	58	1,044
SS 85/20	SS85/20 CBN	85mm	58	1,044
SS 100/20	SS100/20 CBN	100mm	50	900

POST CAPS

- Covers protruding metal fence posts and Re-Bar 12-36mm Diameter
- Prevents Cuts and Abrasions
- UV stabilised for Extended Life
- Suitable for Building Sites and Stockyards
- In-built Strap and Side Hole feature to Tie up Safety Mesh or Prevent Loss





50 Multipurpose Pile Cage Spacer Wheel



75 Standard Wheels

STANDARD PILE CAGE WHEEL

The Standard Pile Cage Spacers, also known as FastWheels or Circular Spacers, provide an economical option to the Heavy Duty Pile Cage Wheel range. The **50 Multipurpose** Pile Cage Spacer Wheel is an economic option to the popular 50 Heavy Duty Wheel. The 50 MultiPurpose Wheel uses the same bar entry mechanism from the Heavy Duty range and introduces a new, simpler push-down bar lock device. The Standard Wheels are especially suited to smaller 6-10mm diameter reinforcing bar.

STANDARD CAGE WHEEL SIZE OPTIONS

PRODUCT	PRODUCT CODE	CONCRETE COVER	SUIT BAR SIZE	WIDTH	QTY PER BAG	QTY PER PALLET
25mm Lightweight Wheel	LW25MM	25mm	<13mm	14mm	500	N/A
50 Standard Wheel	STD50MM	50mm	<13mm	26mm	100	4000
50 Multi Purpose Wheel	MP50/20	50mm	<20mm	34mm	60	2880
75 Standard Wheel	STD75/20	75mm	<20mm	30mm	40	2160
75/30 Webbed Wheel	75/20 L/W WHEEL	75mm	30mm	15mm	70	2940
75/39 Webbed Wheel	75/39 L/W WHEEL	75mm	39mm	15mm	70	2940

PILE CAGE FOOT

The **Pile Cage Foot** is used to provide concrete cover at the base of a Pile Cage. This 2 Piece product requires assembly before use. Available in 3 sizes 85mm, 100mm and 150mm Cage Feet. The **Cage Foot Extension** fits to an 85mm Cage Foot to maintain the 500kg load carrying capacity. This economic, push-on part also reduces the need to stock 2 or more bulky products.



PILE CAGE FOOT SIZE OPTIONS

PRODUCT	PRODUCT CODE	CONCRETE COVER	SUIT BAR SIZE	QTY PER BAG	QTY PER PALLET	MAX. LOAD CAPACITY
85mm Cage Foot	CF85	85mm	20-39mm	60	2160	500kg
100mm Cage Foot	CF100	100mm	20-39mm	50	2400	200kg
150mm Cage Foot	CF150	150mm	20-39mm	40	1920	250kg
100mm Cage Foot Extension	CFE100	100mm	suits CF85	60	N/A	500kg
150mm Cage Foot Extension	CFE150	150mm	suits CF85	60	N/A	500kg

Cage Foot Extension requires 85mm Cage Foot